

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	HELLER	2023.05.19

Specifications/技术规格:

Current Rating: 1A
额定电流: 1A

Voltage rating: 30V AC,DC
额定电压: 30V AC,DC

Insulation Resistance: 100MΩ Min.
绝缘电阻: 最小100MΩ






Dielectric Withstanding: 200V AC
耐电压: 200V AC

Operating Temperature: -25°C to +85°C
工作温度: -25°C 到 85°C

Materials/材料:

Insulation Material: PA/PBT/LCP UL94 V-0 Black
绝缘体塑胶材料: PA/PBT/LCP UL94 V-0 黑色

CKT.	A	B	C
2	0.80	1.80	4.40
3	1.60	2.60	5.20
4	2.40	3.40	6.00
5	3.20	4.20	6.80
6	4.00	5.00	7.60
7	4.80	5.80	8.40
8	5.60	6.60	9.20
9	6.40	7.40	10.00
10	7.20	8.20	10.80
11	8.00	9.00	11.60
12	8.80	9.80	12.40
13	9.60	10.60	13.20
14	10.40	11.40	14.00
15	11.20	12.20	14.80
16	12.00	13.00	15.60
17	12.80	13.80	16.40
18	13.60	14.60	17.20
19	14.40	15.40	18.00
20	15.20	16.20	18.80

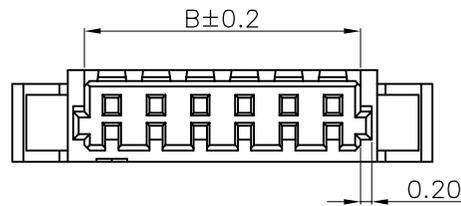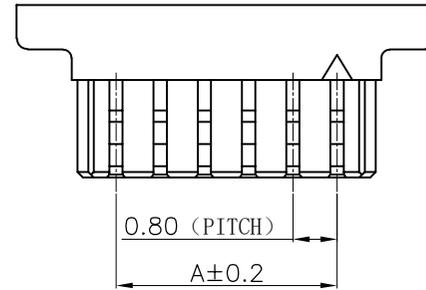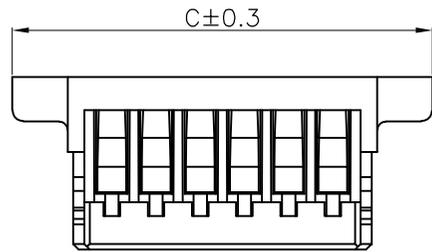

 浙江快利电子有限公司
ZheJiang KuaiLi Electronic Co., LTD.

GENERAL TOLERANCE

X.: ± 3'	X.: ±0.35
.X: ± 2'	X.X: ±0.25
.XX: ± 1'	X.XX: ±0.15
.XXX: ± 0.5'	X.XXX: ±0.10

DESIGN: 张国旭

DATE: 2023.05.19

CHECKED: 朱继衡

DATE: 2023.05.19

APPROVED: 王子林

DATE: 2023.05.19

DWG. NO.

PART NO.

KL-SUH-NY

TITLE.

SUH-NY

REV.	UNIT.	SCALE.	PROJ.
A	mm	-	