




1 2 3 4 5 6 7 8 9



REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	HELLER	2022.10.5

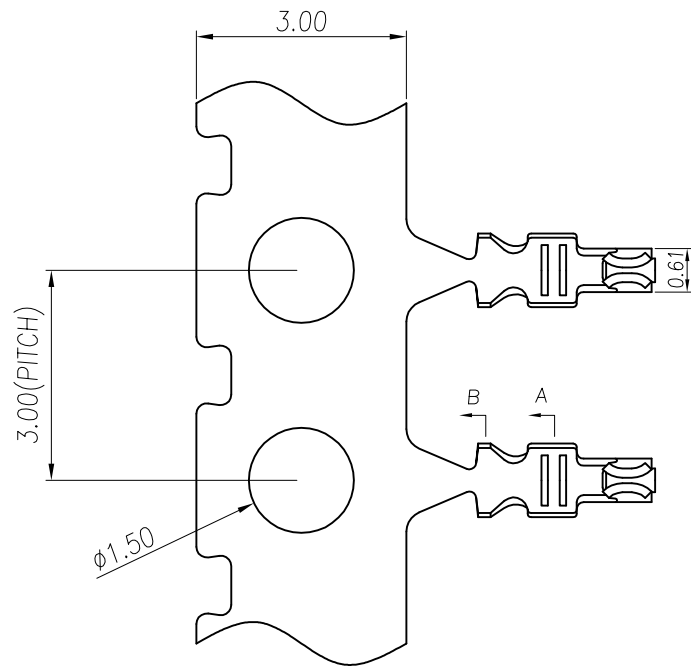

SECT. A-A



SECT. B-B



Specifications / 技术规格:

Current Rating: 1A
 额定电流: 1A
 Voltage rating: 50V AC,DC
 额定电压: 50V AC,DC
 Insulation Resistance: 500 MΩ Min.
 绝缘电阻: 最小500MΩ
 Dielectric Withstanding: 500V AC
 耐电压: 500V AC
 Contact Resistance: 20mΩ Max.
 接触电阻: 最大20mΩ
 Operating Temperature: -25°C to +85°C
 工作温度: -25°C 到 85°C
 Materials / 材料:
 Contact Material: Phosphor Bronze (Tin plated)
 接触端子材料: 磷铜 (镀锡)

 浙江快利电子有限公司
 Zhejiang Kuaili Electronic Co., Ltd

GENERAL TOLERANCE	
X° ± 3'	.XXX: --
X' ± 2'	.XX: ±0.20
.XX' ± 1'	.X: ±0.30
.XXX' ± 0.5'	X: --

DESIGN: HELLER
 AUDITED: 王子林
 APPROVED: 朱建春

DATE: 22'.10.05
 DATE: 22'.10.05
 DATE: 22'.10.05

DWG. NO.
 PART NO.
 KL-SUH-TE

TITLE.
 SUH-TE

1 2 3 4 5 6 7 8 9