

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	HELLER	

ROHS





Specifications

Current rating: 7A
 额定电流: 7A
 Voltage rating: 250V AC,DC
 额定电压: 250V AC, DC
 Insulation Resistance: 1000MΩ Min.
 绝缘电阻: 最小1000MΩ
 Dielectric Withstanding: 1500V AC 1Min
 耐电压: 1500V AC 1分钟
 Contact Resistance: 20mΩ Max.
 接触电阻: 最大20mΩ
 Operating Temperature: -25°C to +85°C
 工作温度: -25°C 到85°C

Materials

Contact Material: Brass (Tin Plating)
 接触端子材料: 黄铜(镀锡)
 Insulation Material: PA or PBT UL94V-2 Natural color
 绝缘塑胶材质: PA 或 PBT UL94V-2 本色

Circuit No.1

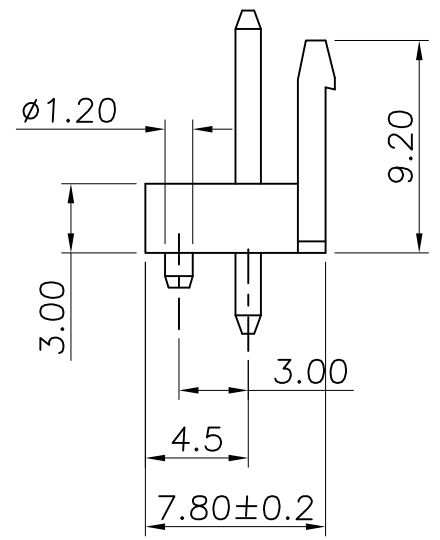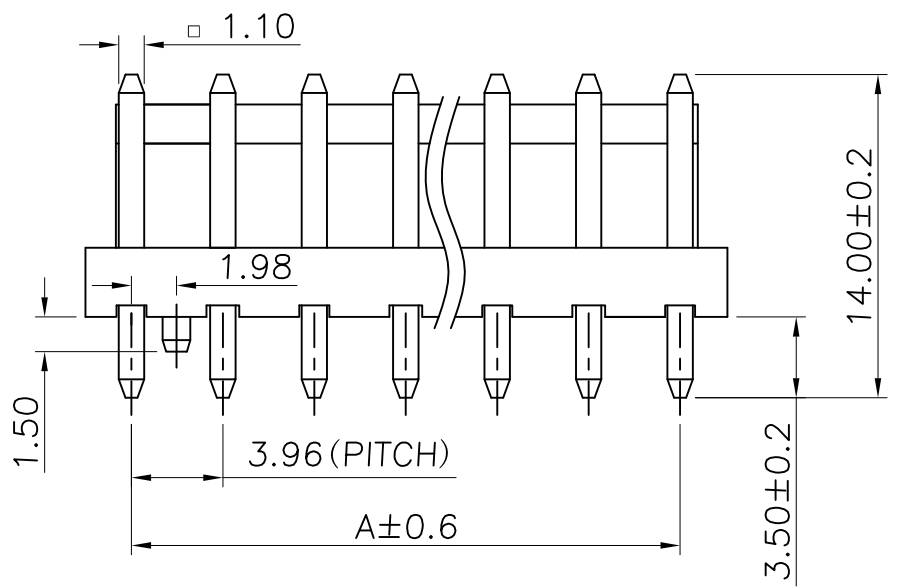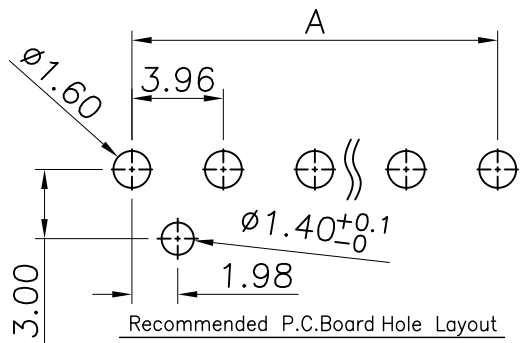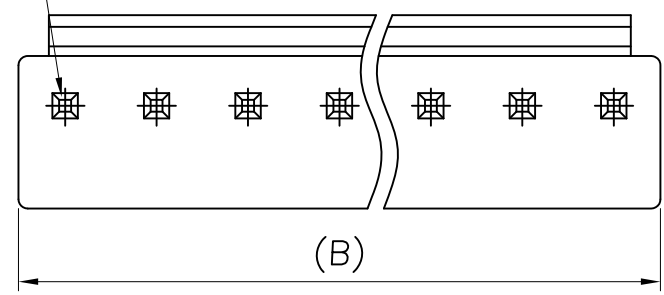

PIN数	尺寸 (mm)	
	A	B
2	3.96	7.92
3	7.92	11.88
4	11.88	15.84
5	15.84	19.80
6	19.80	23.76
7	23.76	27.72
8	27.72	31.68
9	31.68	35.64
10	35.64	39.6
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44
15	55.44	59.40

浙江快利电子有限公司
 Zhejiang Kuaili Electronic Co., Ltd

GENERAL TOLERANCE	
X.* ± 3"	.XXX ± 0.10
.X* ± 2"	.XX ± 0.25
.XX* ± 1"	.X ± 0.30
.XXX* ± 0.5"	X.* ± 0.35

DESIGN:	HELLER	DATE:	21'.12.30
CHECKED:	瞿益远	DATE:	21'.12.30
AUDITED:	朱建慧	DATE:	21'.12.30
APPROVED:	朱建华	DATE:	21'.12.30

DWG. NO.	PART NO. KL-VH-NAD
TITLE:	
VH-NAD连接器	

REV.	A	UNIT.	MM	SCALE.	1:1