

ROHS




REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	HELLER	21.06.24

Specifications / 技术规格:

Current rating: 7A
 额定电流: 7A
 Voltage rating: 250V AC,DC
 额定电压: 250V AC,DC
 Insulation Resistance: 1000MΩ Min.
 绝缘电阻: 最小1000MΩ
 Dielectric Withstanding: 1500V AC 1Min
 耐电压: 1500V AC 1分钟
 Contact Resistance: 20mΩ Max.
 接触电阻: 最大20mΩ
 Operating Temperature: -25°C to +85°C
 工作温度: -25°C 到85°C

Materials / 材料:

Insulation Material: PA or PBT UL94V-2
 绝缘塑胶材质: PA 或 PBT UL94V-2

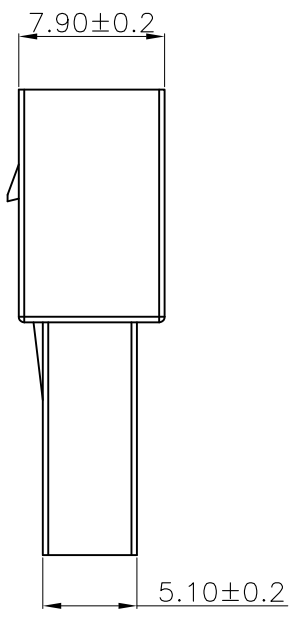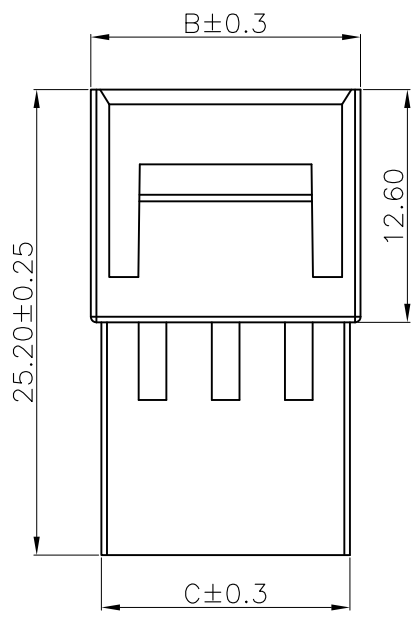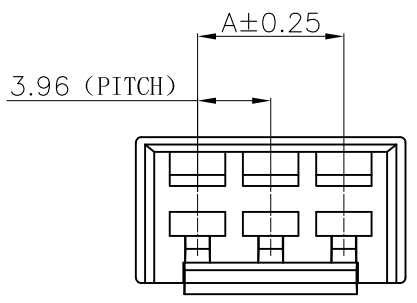

孔数	A	B	C
2	3.96	10.64	9.49
3	7.92	14.60	13.45
4	11.88	18.56	17.41
5	15.84	22.52	21.37
6	19.80	26.48	25.33
7	23.76	30.44	29.29
8	27.72	34.40	33.25
9	31.68	38.36	37.21
10	35.64	42.32	41.17
11	39.60	46.28	45.13
12	43.56	50.24	49.09
13	47.52	54.20	53.05
14	51.48	58.16	57.01
15	55.44	62.12	60.97


 浙江快利电子有限公司
 Zhejiang Kuaili Electronic Co., Ltd

GENERAL TOLERANCE	
X.* ± 3*	.XXX: ±0.10
.X* ± 2*	.XX : ±0.25
.XX* ± 1*	.X : ±0.30
.XXX* ± 0.5*	X. : ±0.35

DESIGN:	HELLER	DATE:	2021-06-24
CHECKED:		DATE:	
AUDITED:		DATE:	
APPROVED:		DATE:	

DWG. NO.	
PART NO.	KL-VH-NAS

TITLE.	VH-NAS
--------	--------

REV.	A	UNIT.	MM	SCALE.	1:1	
------	---	-------	----	--------	-----	---