


1 2 3 4 5 6 7 8 9

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	KEVIN	

ROHS



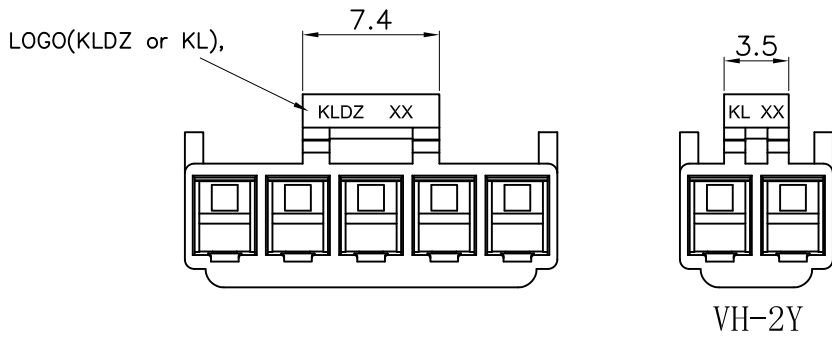


Specifications / 技术规格:

Current rating: 7A
 额定电流: 7A
 Voltage rating: 250V AC,DC
 额定电压: 250V AC,DC
 Insulation Resistance: 1000MΩ Min.
 绝缘电阻: 最小1000MΩ
 Dielectric Withstanding: 1500V AC 1Min
 耐电压: 1500V AC 1分钟
 Contact Resistance: 20mΩ Max.
 接触电阻: 最大20mΩ
 Operating Temperature: -25°C to +85°C
 工作温度: -25°C 到 85°C

Materials / 材料:

Insulation Material: PA or PBT UL94V-2 Natural
 绝缘塑胶材质: PA 或 PBT UL94V-2 本色

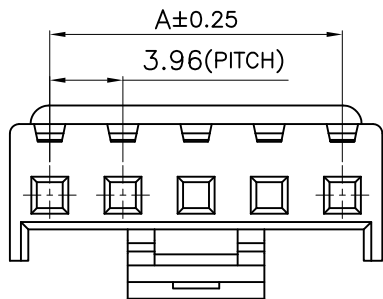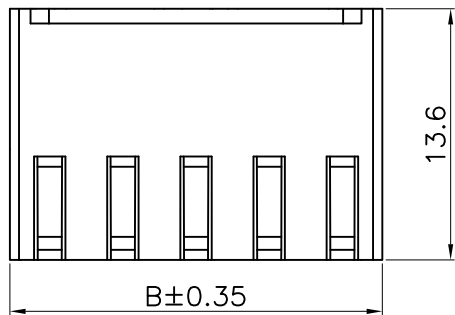

CKT.	A	B
2	3.96	8.28
3	7.92	12.24
4	11.88	16.20
5	15.84	20.16
6	19.80	24.12
7	23.76	28.08
8	27.72	32.04
9	31.68	36.00
10	35.64	39.96
11	39.6	43.92
12	43.56	47.88
13	47.52	51.84
14	51.48	55.80
15	55.44	59.78

浙江快利电子有限公司
 Zhejiang Kuaili Electronic Co., Ltd

GENERAL TOLERANCE	
X* ± 3'	.XXX ±0.10
.X* ± 2'	.XX ±0.25
.XX* ± 1'	.X ±0.30
.XXX* ± 0.5'	X. ±0.35

DESIGN: KEVIN	DATE: 2014-09-11
CHECKED:	DATE:
AUDITED:	DATE:
APPROVED:	DATE:

DWG. NO.	PART NO. KL-VH-NY
TITLE:	
VH-NY	

REV. A	UNIT. MM	SCALE. 1:1	
--------	----------	------------	--

1 2 3 4 5 6 7 8 9