

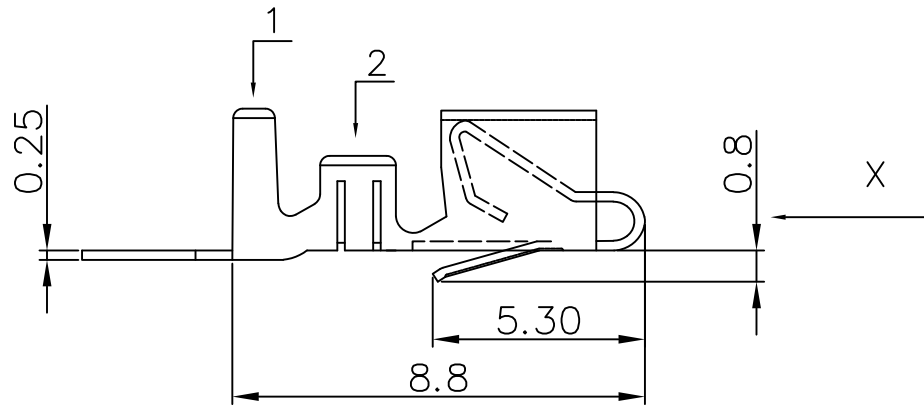




REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	LXM	2016.4.15

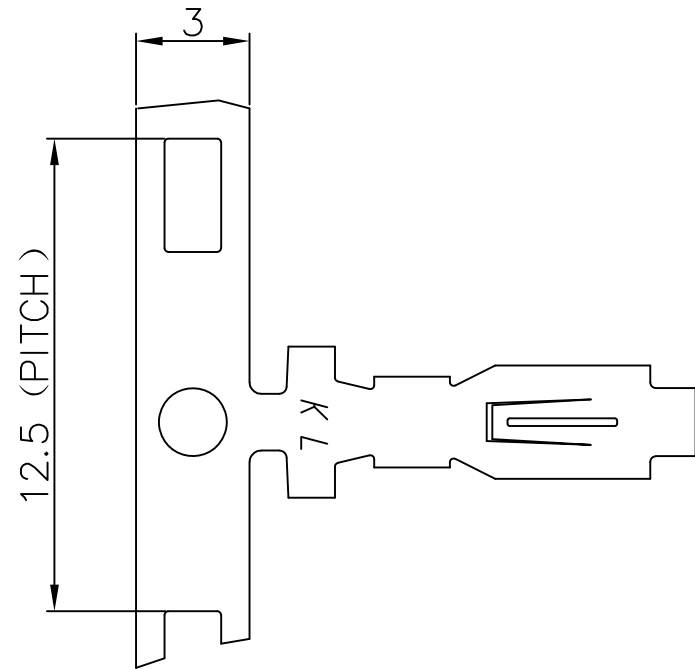

Specifications /技术规格:

Current Rating: 7A

额定电流: 7A

Insulation Resistance: 1000M Ω Min.

绝缘电阻: 最小1000M Ω

Dielectric Withstanding: 1500V AC

耐电压: 1500V AC

Contact Resistance: 30m Ω Max.

接触电阻: 最大30m Ω

Operating Temperature: -25°C to +85°C


工作温度: -25°C 到 85°C

Materials /材料:

Contact Material: Phosphor Bronze(Tin plating)

接触端子材料: 磷铜(镀锡)

 浙江快利电子有限公司
ZheJiang KuaiLi Electronic Co., LTD.

REV.	UNIT.	SCALE.	PAGE.	PROJ.
A	mm	-	1/1	

GENERAL TOLERANCE

X.: $\pm 3^\circ$	X.: ± 0.35
.X: $\pm 2^\circ$	X.X: ± 0.25
.XX: $\pm 1^\circ$	X.XX: ± 0.15
.XXX: $\pm 0.5^\circ$	X.XXX: ± 0.10

DESIGN: LXM

DATE: 2016-04-15

DWG. NO.

TITLE.

CHECKED: 李晓明

DATE: 2016-04-15

PART NO.

VH-TE

APPROVED: 朱建华

DATE: 2016-04-15

KL-VH-X-TE