
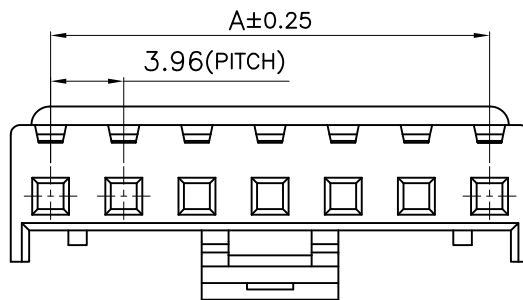
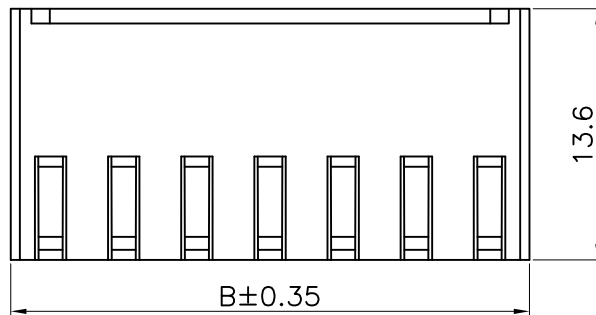



1 2 3 4 5 6 7 8 9

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	HELLER	2016.6.11

ROHS

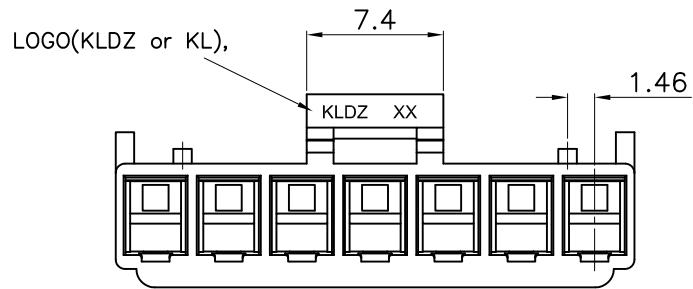

Specifications / 技术规格:

Current rating: 7A
 额定电流: 7A
 Voltage rating: 250V AC,DC
 额定电压: 250V AC,DC
 Insulation Resistance: 1000MΩ Min.
 绝缘电阻: 最小1000MΩ
 Dielectric Withstanding: 1500V AC 1Min
 耐电压: 1500V AC 1分钟
 Contact Resistance: 20mΩ Max.
 接触电阻: 最大20mΩ
 Operating Temperature: -25°C to +85°C
 工作温度: -25°C 到85°C

Materials / 材料:

Insulation Material: PA or PBT UL94V-2 Natural
 绝缘塑胶材质: PA 或 PBT UL94V-2 本色

CKT.	A	B
5	15.84	20.16
6	19.80	24.12
7	23.76	28.08
8	27.72	32.04
9	31.68	36.00
10	35.64	39.96
11	39.6	43.92
12	43.56	47.88
13	47.52	51.84
14	51.48	55.80
15	55.44	59.78

浙江快利电子有限公司
 Zhejiang Kuaili Electronic Co., Ltd

GENERAL TOLERANCE

X* ± 3°	.XXX ±0.10
.X* ± 2°	.XX ±0.25
.XX* ± 1°	.X ±0.30
.XXX* ± 0.5°	X. ±0.35

DESIGN:	HELLER	DATE:	2016-06-11
CHECKED:		DATE:	
AUDITED:		DATE:	
APPROVED:		DATE:	

DWG. NO.	
PART NO.	KL-VHR-NY

TITLE.	VHR-NY
--------	--------

REV.	A	UNIT.	MM	SCALE.	1:1	
------	---	-------	----	--------	-----	--

1 2 3 4 5 6 7 8 9