

1 2 3 4 5 6 7 8 9

ROHS

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	HELLER	2021.4.8

Specifications / 技术规格:

Current Rating: 3A

额定电流: 3A

Voltage rating: 250V AC,DC

额定电压: 250V AC, DC

Insulation Resistance: 1000MΩ Min.

绝缘电阻: 最小1000MΩ

Dielectric Withstanding: 1000V AC

耐电压: 1000V AC




Operating Temperature: -25°C to +85°C

工作温度: -25°C 到 85°C

Materials / 材料:


Insulation Material: PA or PBT UL94V-2

绝缘体塑胶材料: PA 或 PBT UL94V-2

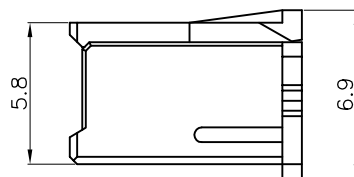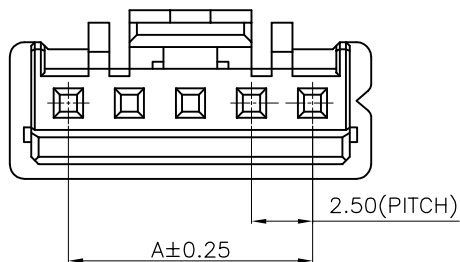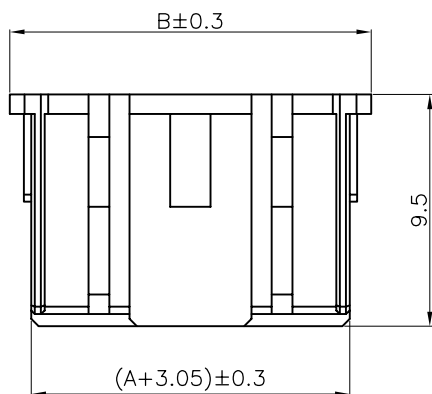

孔数	A	B
2	2.50	7.30
3	5.00	9.80
4	7.50	12.30
5	10.00	14.80
6	12.50	17.30
7	15.00	19.80
8	17.50	22.30
9	20.00	24.80
10	22.50	27.30
11	25.00	29.80
12	27.50	32.30
13	30.00	34.80
14	32.50	37.30
15	35.00	39.80
16	37.50	42.30
17	40.00	44.80
18	42.50	47.30
19	45.00	49.80
20	47.50	52.30

 浙江快利电子有限公司
ZheJiang KuaiLi Electronic Co., LTD.

REV. A UNIT. mm SCALE. - PROJ. 

GENERAL TOLERANCE	
X.: ±3°	X.: --
.X: ±2°	X.X: ±0.30
.XX: ±1°	X.XX: ±0.20
.XXX: ±0.5°	X.XXX: --

DESIGN: 瞿益远
CHECKED:
APPROVED:

DATE: 2021-04-08
DATE:
DATE:

DWG. NO.
PART NO. KL-XA-NY

TITLE: XA-NY

1 2 3 4 5 6 7 8 9