

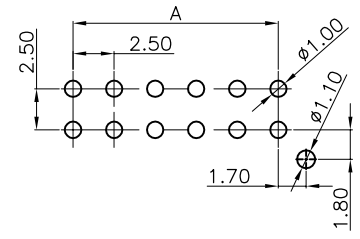
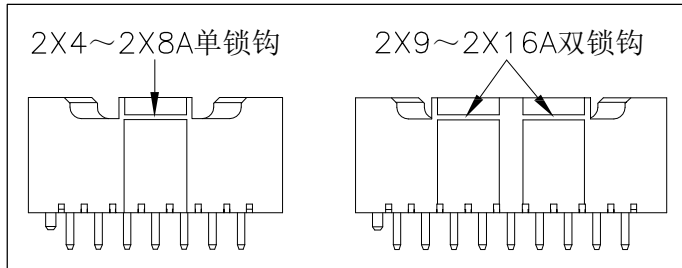
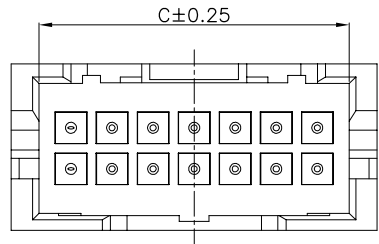
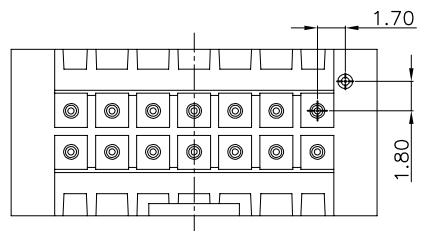


RoHS

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	HELLER	

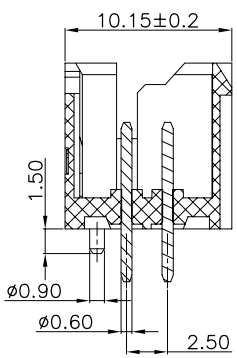

Recommended P.C.Board Hole Layout

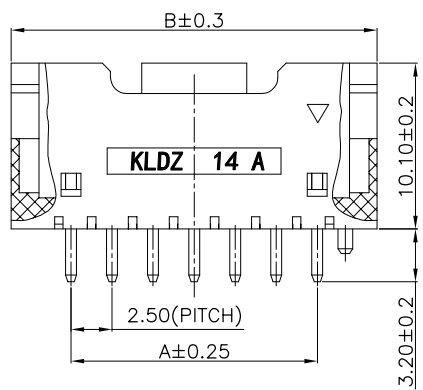

PIN数	A	B	C
2X4	7.50	15.00	11.40
2X5	10.00	17.50	13.90
2X6	12.50	20.00	16.40
2X7	15.00	22.50	18.90
2X8	17.50	25.00	21.40
2X9	20.00	27.50	23.90
2X10	22.50	30.00	26.40
2X11	25.00	32.50	28.90
2X12	27.50	35.00	31.40
2X13	30.00	37.50	33.90
2X14	32.50	40.00	36.40
2X15	35.00	42.50	38.90
2X16	37.50	45.00	41.40

Specifications / 技术规格:

Current rating: 3A
 额定电流: 3A
 Voltage rating: 250V AC,DC
 额定电压: 250V AC,DC
 Insulation Resistance: 1000MΩ Min.
 绝缘电阻: 最小1000MΩ
 Withstanding voltage: 1000V AC 1Min
 耐电压: 1000V AC 1分钟
 Contact Resistance: 20mΩ Max.
 接触电阻: 最大20mΩ
 Operating Temperature: -25°C to +85°C
 工作温度: -25°C 到 85°C

Materials / 材料:
 Contact Material: Brass(Tin plated)
 接触端子材料: 黄铜(镀锡)
 Insulation Material: PA or PBT UL94V-0
 绝缘体塑胶材质: PA 或 PBT UL94 V-0

浙江快利电子有限公司
 Zhejiang Kuaili Electronic Co., Ltd

GENERAL TOLERANCE	
X.* ± 3'	X. ±0.35
.X* ± 2'	.X ±0.25
.XX* ± 1'	.XX ±0.15
.XXX* ± 0.5'	.XXX ±0.10

DESIGN: HELLER
 CHECKED:
 AUDITED:
 APPROVED:

DATE: 2020.11.25
 DATE:
 DATE:
 DATE:

DWG. NO.
 PART NO.
 KL-XAD-2XNAD-H01

TITLE:
XAD-2XNAD
 (高温料)

REV.	A	UNIT.	MM	SCALE.	1:1