
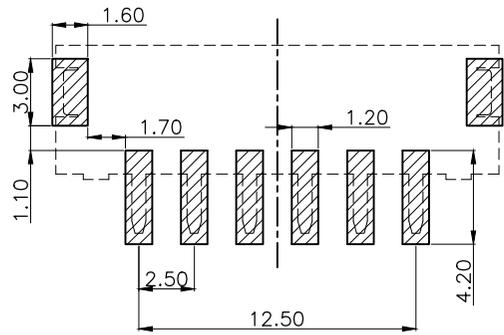


1 2 3 4 5 6 7 8 9

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	HELLER	2016.8.13
A1	20190616001	调整⊙处公差	HELLER	2019.6.16

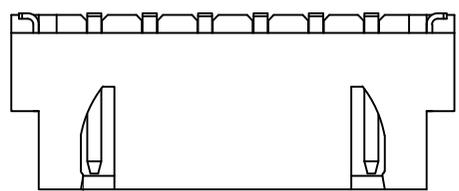

孔数	型号	尺寸 (mm)		
		A	B	C
2	XH-2ALT	2.5	7.5	10.0
3	XH-3ALT	5.0	10.0	12.5
4	XH-4ALT	7.5	12.5	15.0
5	XH-5ALT	10.0	15.0	17.5
...
20	XH-20ALT	47.5	52.5	55.0




ROHS

Specifications/技术规格:

Current rating: 3A
 额定电流: 3A
 Voltage rating: 250V AC,DC
 额定电压: 250V AC,DC
 Insulation Resistance: 1000MΩ Min.
 绝缘电阻: 最小1000MΩ
 Dielectric Withstanding: 1000V AC 1Min
 耐压: 1000V AC 1分钟
 Contact Resistance: 20mΩ Max.
 接触电阻: 最大20mΩ
 Operating Temperature: -25°C to +85°C
 工作温度: -25°C 到 85°C

Materials/材料:

Contact Material: Brass(Sn plating)
 接触铜针材料: 黄铜(镀锡)
 Soldering Terminal: Bronze(Sn plating)
 焊片材料: 磷铜(镀锡)
 Insulation Material: LCP UL94V-0
 绝缘体材料: LCP UL94 V-0

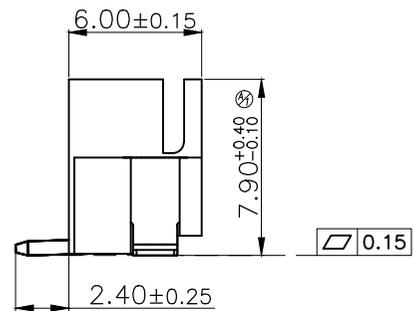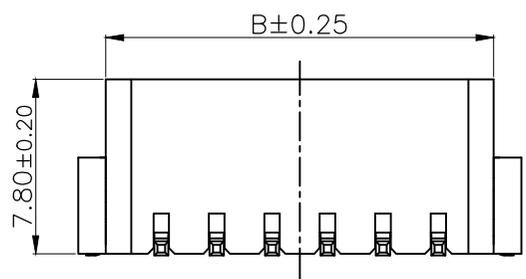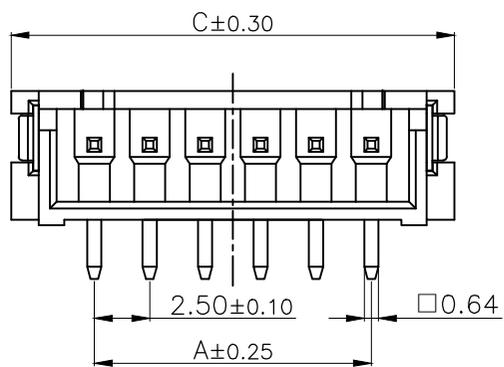

浙江快利电子有限公司
 Zhejiang Kuaili Electronic Co., Ltd

GENERAL TOLERANCE	
X.* ± 3'	.XXX ±0.10
.X' ± 2'	.XX ±0.15
.XX' ± 1'	.X ±0.25
.XXX' ± 0.5'	X. ±0.35

DESIGN:	HELLER	DATE:	2019.6.16
CHECKED:	瞿益远	DATE:	2019.6.16
AUDITED:	朱建慧	DATE:	2019.6.16
APPROVED:	朱建华	DATE:	2019.6.16

DWG. NO.	PART NO. KL-XH-NALT
TITLE.	

TITLE:
XH-NALT连接器

REV.	UNIT.	SCALE.
A1	MM	1:1

1 2 3 4 5 6 7 8 9