
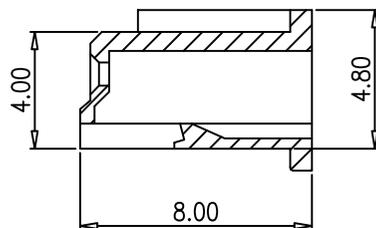




1 2 3 4 5 6 7 8 9

ROHS


REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	HELLER	2017.3.9

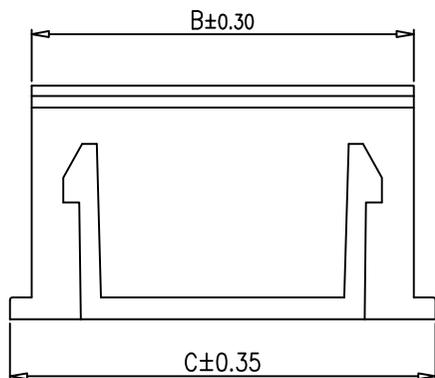


A-A

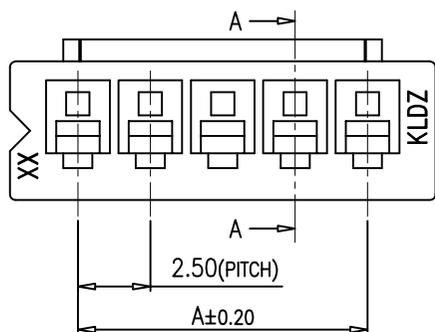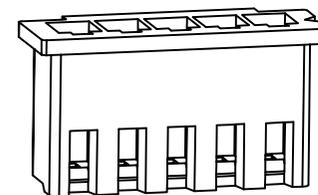

POLES	DIM (mm)		
	A	B	C
2	2.5	5.8	7.3
3	5.0	8.3	9.8
4	7.5	10.8	12.3
5	10.0	13.3	14.8
6	12.5	15.8	17.3
7	15.0	18.3	19.8
8	17.5	20.8	22.3
9	20.0	23.3	24.8
10	22.5	25.8	27.3
11	25.0	28.3	29.8
12	27.5	30.8	32.3
13	30.0	33.3	34.8
14	32.5	35.8	37.3
15	35.0	38.3	39.8
16	37.5	40.8	42.3

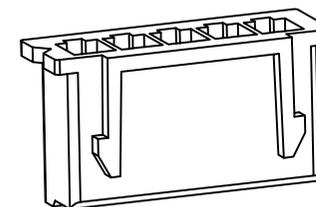

SPECIFICATIONS:  
 1. Operation temperature : -25~+85°C;  
 2. Current rating: 3.0A;  
 3. Voltage rating: 250V DC/AC;  
 4. Contact resistance: 20mΩ max;  
 5. Insulation resistance: 1000MΩ min;  
 6. Dielectric voltage: 1000V AC /1minute;  
 7. Insulation material: PA or PBT UL94V-2;  
 8. Environmental requirement: according to ROHS standard.

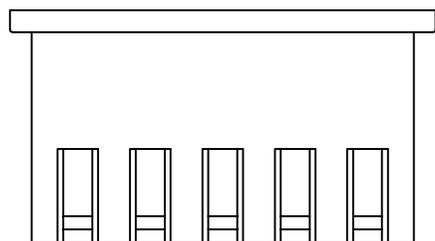

 浙江快利电子有限公司  
 Zhejiang Kuaili Electronic Co., Ltd.

GENERAL TOLERANCE

X.° ± 3'	.XXX	--
.X° ± 2'	.XX	±0.20
.XX° ± 1'	.X	±0.30
.XXX° ± 0.5'	X.	--

DESIGN: HELLER

DATE: 2017.03.09

DWG. NO.

TITLE.

REV.	A	UNIT.	MM	SCALE.	-	

CHECKED:

DATE:

PART NO.

APPROVED:

DATE:

KL-XH-NY

XH-NY

1 2 3 4 5 6 7 8 9