

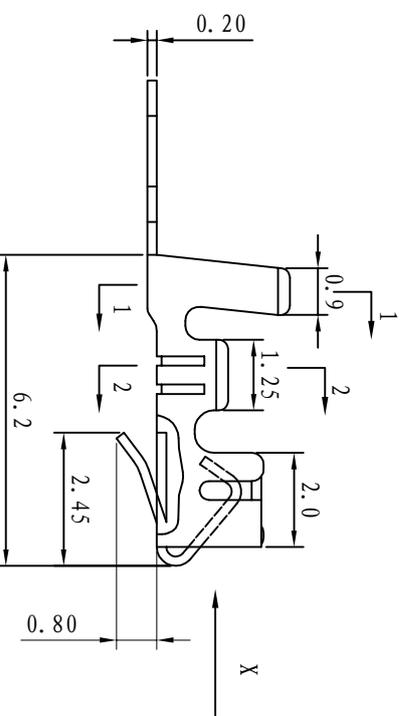
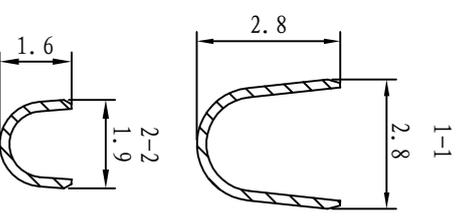


REV.	ECN NO.	DESCRIPTION	REVISED	DATE
A		新订图面	KEVIN	2016.4.07

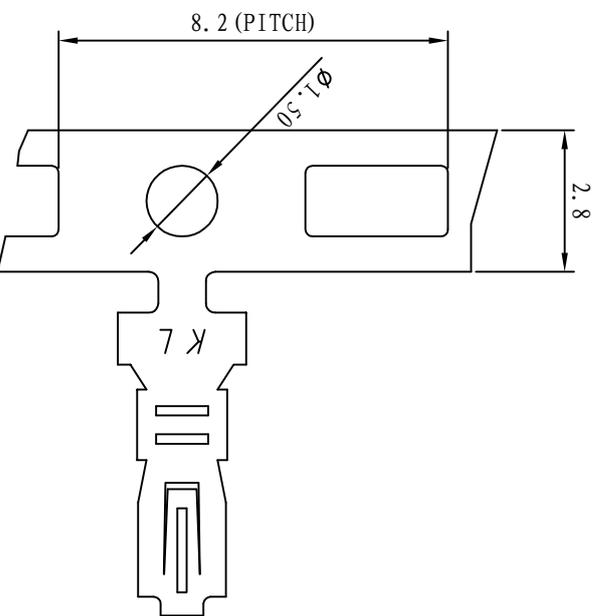

Specifications / 技术规格:

- Current Rating: 3A
额定电流: 3A
- Insulation Resistance: 1000M Ω Min.
绝缘电阻: 最小1000M Ω
- Dielectric Withstanding: 1000V AC
耐电压: 1000V AC
- Contact Resistance: 20m Ω Max.
接触电阻: 最大20m Ω
- Operating Temperature: -25°C to +85°C
工作温度: -25°C 到 85°C
- Materials / 材料:
Contact Material: Phosphor Bronze(Tin plating)
接触端子材料: 磷铜(镀锡)

浙江快利电子有限公司
Zhejiang Kuaile Electronic Co., LTD

REV. A	UNIT. mm	SCALE. -	PAGE. 1/1	PROJ.
--------	----------	----------	-----------	-------

GENERAL TOLERANCE		DESIGN:	DATE:
X: $\pm 3^\circ$	X: -	KEVIN	2016-04-07
.X: $\pm 2^\circ$	X.X: ± 0.30	CHECKED: 李晓明	DATE: 2016-04-07
.XX: $\pm 1^\circ$	X.XX: ± 0.20	APPROVED: 朱建华	DATE: 2016-04-07
.XXX: $\pm 0.5^\circ$	X.XXX: -		

DWG. NO.	TITLE.
PART NO.	XH-TE (18.6)
KL-XH-TE	