

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	HELLER	2016.8.13
A1	20190616001	调整④处公差	HELLER	2019.6.16

孔数	型号	尺寸 (mm)		
		A	B	C
2	XHB-2AL/T	2.5	7.5	10.0
3	XHB-3AL/T	5.0	10.0	12.5
4	XHB-4AL/T	7.5	12.5	15.0
5	XHB-5AL/T	10.0	15.0	17.5
...
20	XHB-20AL/T	47.5	52.5	55.0

ROHS

Specifications / 技术规格:

Current rating: 3A
 额定电流: 3A

Voltage rating: 250V AC, DC
 额定电压: 250V AC, DC

Insulation Resistance: 1000MΩ Min.
 绝缘电阻: 最小1000MΩ





Dielectric Withstanding: 1000V AC 1Min
 耐电压: 1000V AC 1分钟

Contact Resistance: 20mΩ Max.
 接触电阻: 最大20mΩ

Operating Temperature: -25°C to +85°C
 工作温度: -25°C 到85°C

Materials / 材料:
 Contact Material: Brass(Sn plating)
 接触铜针材料: 黄铜(镀锡)
 Soldering Terminal: Bronze(Sn plating)
 焊片材料: 磷铜(镀锡)
 Insulation Material: LCP UL94V-0
 绝缘体材料: LCP UL94 V-0

P.C.B LAYOUT

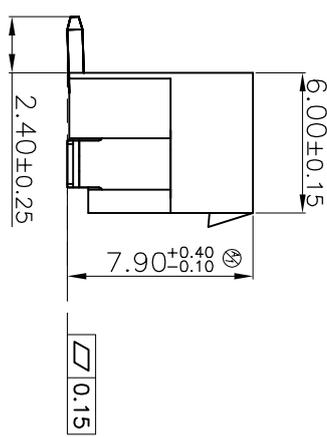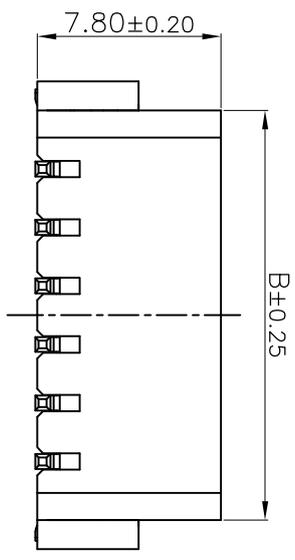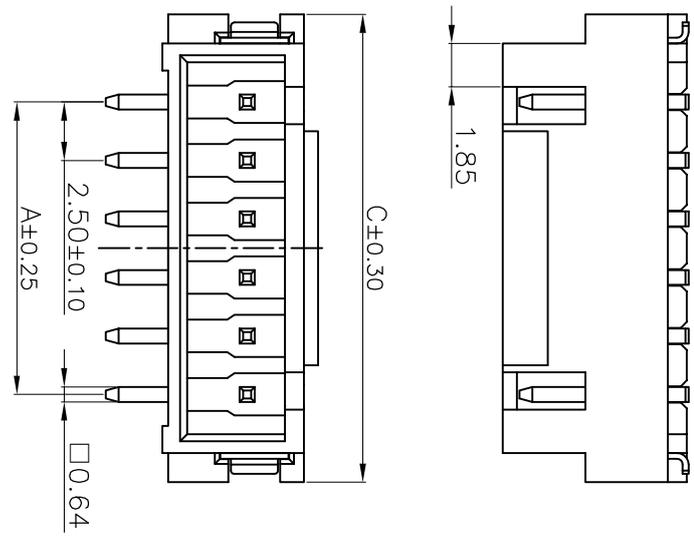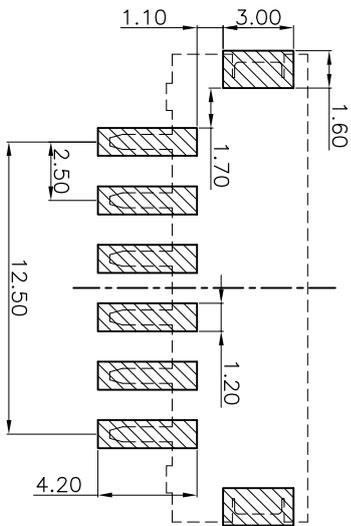

GENERAL TOLERANCE

X* ± 3'	.XXX	± 0.10
X' ± 2'	.XX	± 0.15
.XX' ± 1'	.X	± 0.25
.XXX' ± 0.5'	X.	± 0.35

DESIGN:

HELLER

DATE:

2019.6.16

DWG. NO.

TITLE:

XHB-NAL连接器

浙江快利电子有限公司
 Zhejiang Kuaili Electronic Co., Ltd

REV. A1 UNIT. MM SCALE: 1:1

1 2 3 4 5 6 7 8 9