

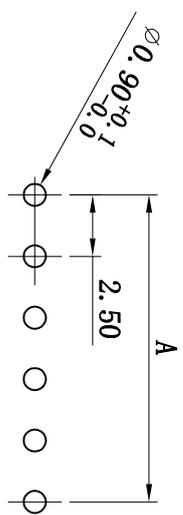
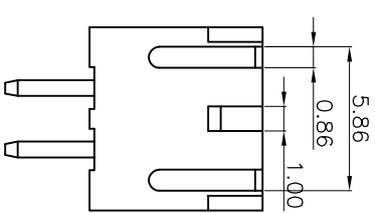
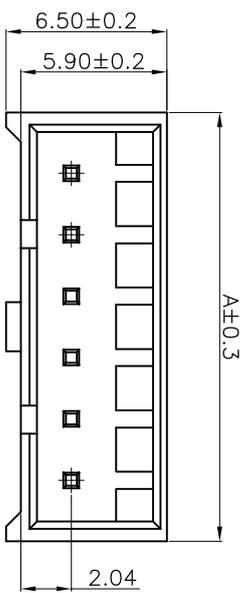


REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	HELLER	

ROHS

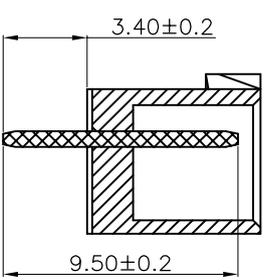

Recommended P.C.Board Hole Layout

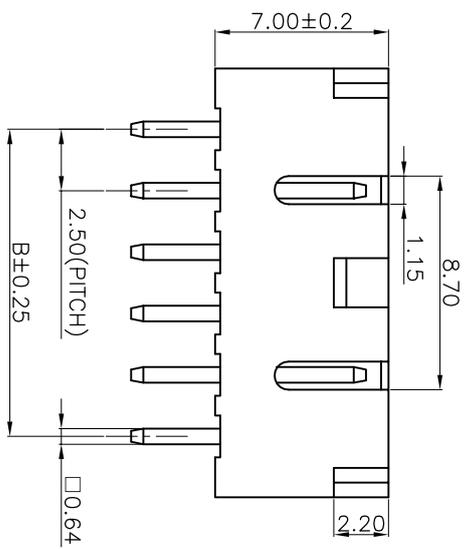

CKT	A	B
2	7.46	2.50
3	9.96	5.00
4	12.46	7.50
5	14.96	10.00
6	17.46	12.50
7	19.96	15.00
8	22.46	17.50
9	24.96	20.00
10	27.46	22.50
11	29.96	25.00
12	32.46	27.50
13	34.96	30.00
14	37.46	32.50
15	39.96	35.00
16	42.46	37.50

Specifications / 技术规格:

- Current rating: 3A
 - 额定电流: 3A
 - Voltage rating: 250V AC,DC
 - 额定电压: 250V AC,DC
 - Insulation Resistance: 1000MΩ Min.
 - 绝缘电阻: 最小1000MΩ
 - Withstanding voltage: 1000V AC 1Min
 - 耐电压: 1000V AC 1分钟
 - Contact Resistance: 20mΩ Max.
 - 接触电阻: 最大20mΩ
 - Operating Temperature: -25°C to +85°C
 - 工作温度: -25°C 到85°C
- Materials / 材料:**
- Contact Material: Brass(Tin plating)
 - 接触端子材料: 黄铜(镀锡)
 - Insulation Material: PA or PBT UL94V-0
 - 绝缘体塑胶材料: PA 或 PBT UL94V-0

浙江快利电子有限公司
Zhejiang Kuaili Electronic Co., Ltd

REV. A UNIT. MM SCALE: 1:1

GENERAL TOLERANCE		DESIGN: HELLER		DATE: 2020.09.30		DWG. NO.		TITLE:	
X. ± 3'	X. ± 0.35	CHECKED:	DATE:						XH/MS-NA (高温料)
.X' ± 2'	.X ± 0.25	AUDITED:	DATE:						
.XX' ± 1'	.XX ± 0.15	APPROVED:	DATE:						
.XXX' ± 0.5'	.XXX ± 0.10								
		PART NO.		KL-XH/MS-NA-H01					