

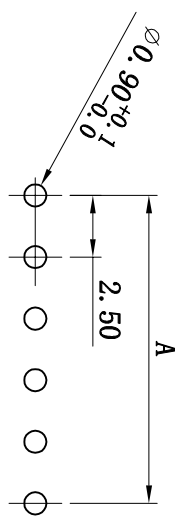

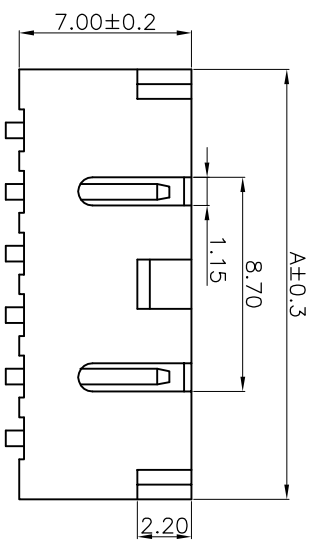


| REV. | ECN NO | DESCRIPTION | REVISED | DATE |
|------|--------|-------------|---------|------|
| A    |        | 新订图面        | HELLER  |      |

**ROHS**

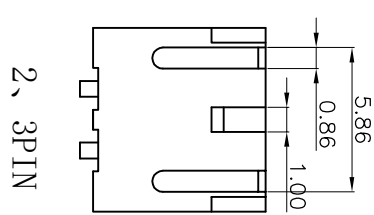

Recommended P.C.Board Hole Layout

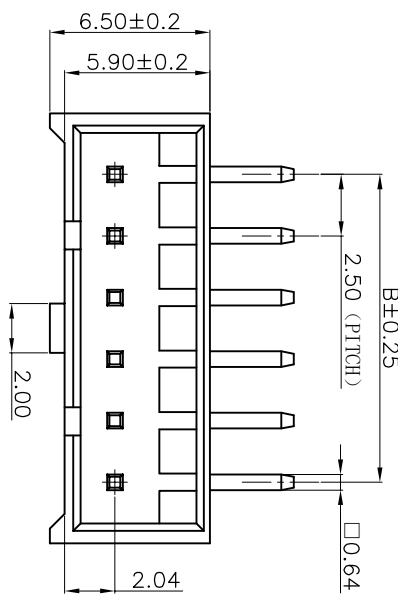

| CKT | A     | B     |
|-----|-------|-------|
| 2   | 7.46  | 2.50  |
| 3   | 9.96  | 5.00  |
| 4   | 12.46 | 7.50  |
| 5   | 14.96 | 10.00 |
| 6   | 17.46 | 12.50 |
| 7   | 19.96 | 15.00 |
| 8   | 22.46 | 17.50 |
| 9   | 24.96 | 20.00 |
| 10  | 27.46 | 22.50 |
| 11  | 29.96 | 25.00 |
| 12  | 32.46 | 27.50 |
| 13  | 34.96 | 30.00 |
| 14  | 37.46 | 32.50 |
| 15  | 39.96 | 35.00 |
| 16  | 42.46 | 37.50 |

Specifications / 技术规格:

- Current rating: 3A
  - 额定电流: 3A
  - Voltage rating: 250V AC,DC
  - 额定电压: 250V AC,DC
  - Insulation Resistance: 1000MΩ Min.
  - 绝缘电阻: 最小1000MΩ
  - Withstanding voltage: 1000V AC 1Min
  - 耐电压: 1000V AC 1分钟
  - Contact Resistance: 20mΩ Max.
  - 接触电阻: 最大20mΩ
  - Operating Temperature: -25°C to +85°C
  - 工作温度: -25° C 到85° C
- Materials / 材料:
- Contact Material: Brass(Tin plating)
  - 接触端子材料: 黄铜(镀锡)
  - Insulation Material: PA or PBT UL94V-0
  - 绝缘体塑胶材料: PA 或 PBT UL94V-0

**浙江快利电子有限公司**  
Zhejiang Kuaili Electronic Co., Ltd

| REV. | UNIT. | SCALE. | Symbol |
|------|-------|--------|--------|
| A    | MM    | 1:1    |        |

| GENERAL TOLERANCE |      |       |
|-------------------|------|-------|
| X' ± 3'           | X.   | ±0.35 |
| X' ± 2'           | .X   | ±0.25 |
| .XX' ± 1'         | .XX  | ±0.15 |
| .XXX' ± 0.5'      | .XXX | ±0.10 |

|                |                  |
|----------------|------------------|
| DESIGN: HELLER | DATE: 2020.09.30 |
| CHECKED:       | DWG. NO.         |
| AUDITED:       | PART NO.         |
| APPROVED:      | KL-XH/MS-NAW-H01 |
| DATE:          | DATE:            |

| TITLE.             |  |
|--------------------|--|
| XH/MS-NAW<br>(高温料) |  |

