
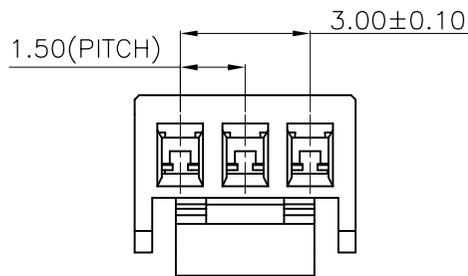

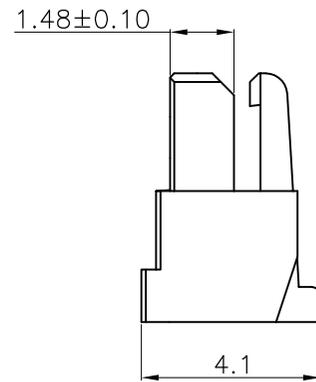
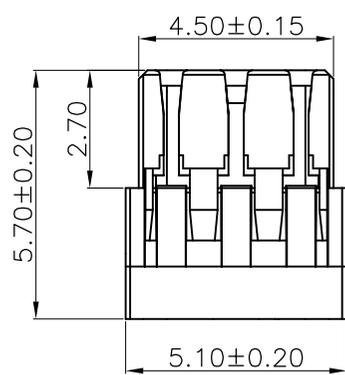


REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	HELLER	2020.06.06

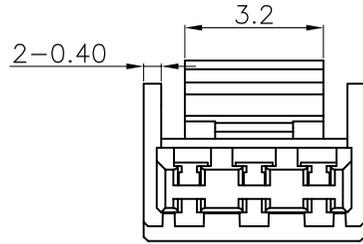

Specifications / 技术规格:

Current Rating: 1A
额定电流: 1A

Voltage rating: 150V AC,DC
额定电压: 150V AC,DC

Insulation Resistance: 500M ΩMin.
绝缘电阻: 最小500MΩ

Dielectric Withstanding: 500V AC
耐电压: 500V AC

Operating Temperature: -25°C to +85°C
工作温度: -25°C 到 85°C

Materials / 材料:

Insulation Material: PA or PBT UL94V-0
绝缘体塑胶材料: PA 或 PBT UL94V-0

 浙江快利电子有限公司
ZheJiang KuaiLi Electronic Co., LTD.

REV. A	UNIT. mm	SCALE. -	PROJ. 
--------	----------	----------	---

GENERAL TOLERANCE	
X.: ± 3'	X.: ± 0.35
.X: ± 2'	X.X: ± 0.25
.XX: ± 1'	X.XX: ± 0.15
.XXX: ± 0.5'	X.XXX: ± 0.10

DESIGN: HELLER	DATE: 2020-06-06
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO.	
PART NO.	KL-ZGH-3Y

TITLE:
ZGH-3Y