
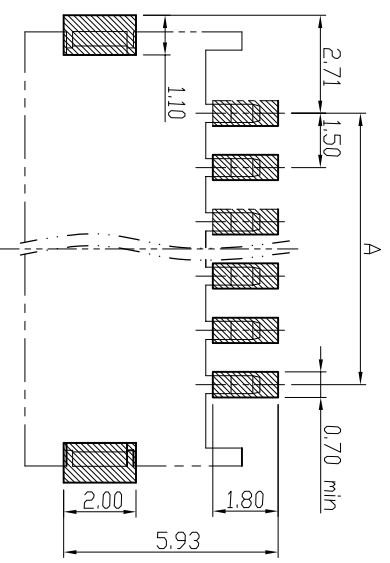


ROHS




REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	KEVIN	

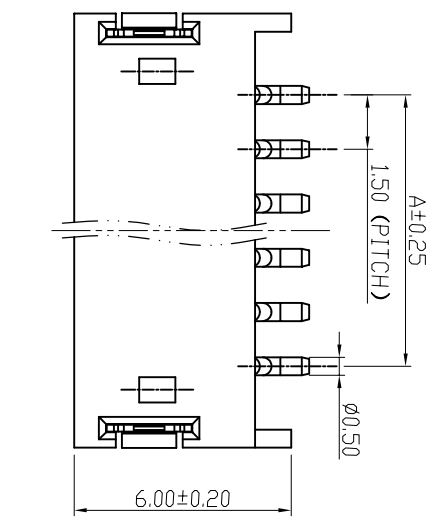

Recommended P.C.Board Layout (top view)

Specifications/技术规格:  
 Current rating: 1A  
 额定电流: 1A  
 Voltage rating: 50V AC,DC  
 额定电压: 50V AC, DC  
 Insulation Resistance: 500MΩ Min.  
 绝缘电阻: 最小500MΩ  
 Dielectric Withstanding: 500V AC 1Min  
 耐电压: 500V AC 1分钟  
 Contact Resistance: 20mΩ Max.  
 接触电阻: 最大20mΩ  
 Operating Temperature: -25°C to +85°C  
 工作温度: -25°C 到85°C

Materials/材料:  
 Contact Material: Brass (Tin plating)  
 接触端子材料: 黄铜(镀锡)  
 Soldering Material: Phos-bronze (Tin plating)  
 焊脚材料: 磷铜(镀锡)  
 Insulation Material: LCP or PA UL94V-0  
 绝缘体塑胶材质: LCP 或 PA UL94V-0

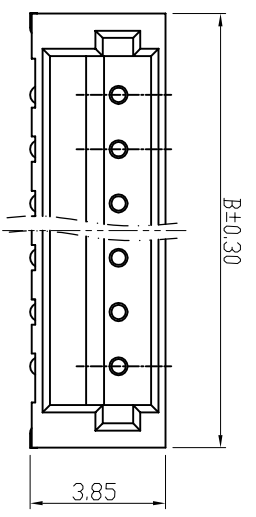

CKT.	DIM	
	A	B
2	1.50	6.00
3	3.00	7.50
4	4.50	9.00
5	6.00	10.50
6	7.50	12.00
7	9.00	13.50
8	10.50	15.00
9	12.00	16.50
10	13.50	18.00
11	15.00	19.50
12	16.50	21.00
13	18.00	22.50
14	19.50	24.00
15	21.00	25.50
16	22.50	27.00

GENERAL TOLERANCE

X <sup>o</sup> ± 3'	XXX : --
X <sup>o</sup> ± 2'	XX : ±0.20
.XX <sup>o</sup> ± 1'	X : ±0.30
.XXX <sup>o</sup> ± 0.5'	.X : --

DESIGN: KEVIN

CHECKED:	DATE:
AUDITED:	DATE:
APPROVED:	DATE:

DATE: 2015-3-10

DWG. NO.

PART NO.

KL-ZH-NAWT

TITLE.

ZH-NAWT



浙江快利电子有限公司  
 Zhejiang Kuaili Electronic Co., Ltd

REV.	UNIT.	SCALE.	Symbol
A	MM	1:1	Symbol