
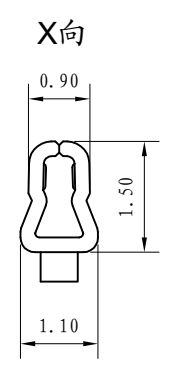
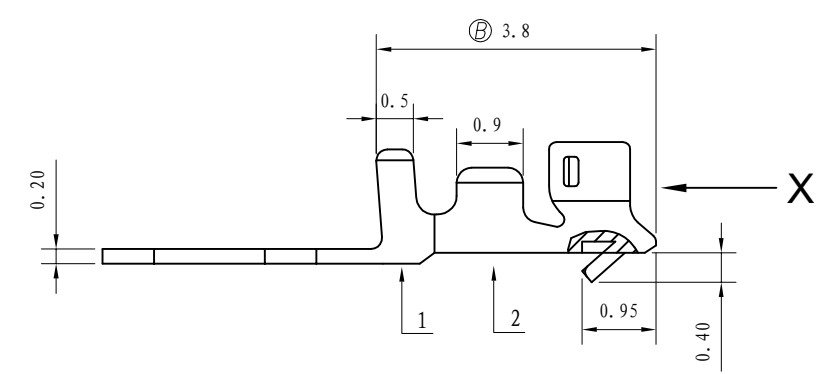




REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	KEVIN	2016.4.18
B	2016122301	修改⊕处尺寸	HELLER	2016.12.23

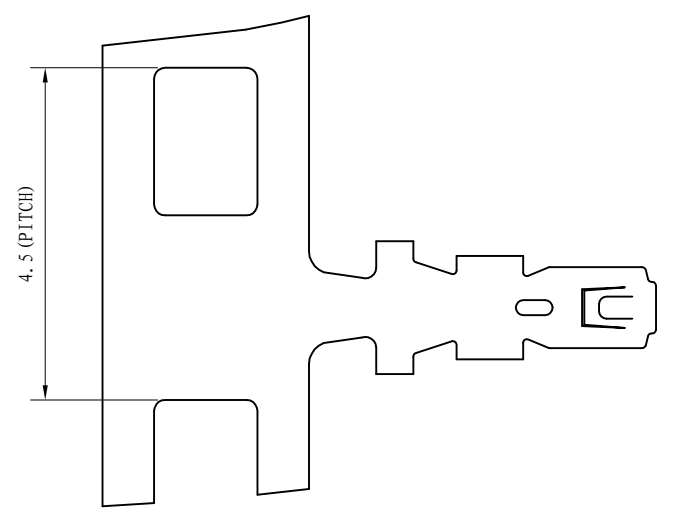


Specifications / 技术规格:

Current Rating: 1A
 额定电流: 1A
 Insulation Resistance: 1000MΩ Min.
 绝缘电阻: 最小1000MΩ
 Dielectric Withstanding: 500V AC
 耐电压: 500V AC
 Contact Resistance: 20mΩ Max.
 接触电阻: 最大20mΩ
 Operating Temperature: -25°C to +85°C
 工作温度: -25°C 到 85°C

Materials / 材料:

Contact Material: Phosphor Bronze (Tin plating)
 接触端子材料: 磷铜 (镀锡)

 浙江快利电子有限公司
 ZheJiang KuaiLi Electronic Co., LTD.

REV.	UNIT.	SCALE.	PAGE.	PROJ.
B	mm	-	1/1	

GENERAL TOLERANCE	
X.: ± 3°	X.: ±0.35
.X: ± 2°	X.X: ±0.25
.XX: ± 1°	X.XX: ±0.15
.XXX: ± 0.5°	X.XXX: ±0.10

DESIGN:	HELLER	DATE:	2016-12-23
CHECKED:	李晓明	DATE:	2016-12-23
APPROVED:	朱建华	DATE:	2016-12-23

DWG. NO.	
PART NO.	KL-ZH-TE

TITLE:
 ZH-TE