

RoHS

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	张国旭	2023. 11. 04

Specifications 技术规格:

Current rating: 5A  
 额定电流: 5A

Voltage rating: 250V AC, DC  
 额定电压: 250V AC, DC






Insulation Resistance: 1000MW Min.  
 绝缘电阻: 最小1000MΩ

Dielectric Withstanding: 1500V AC 1Min  
 耐电压: 1500V AC 1分钟

Contact Resistance: 20m Max.  
 接触电阻: 最大20mΩ

Operating Temperature: -25° C to +85° C  
 工作温度: -25° C 到85° C

Materials/材料:  
 Insulation Material: Nylon UL94V-0/2  
 绝缘体塑胶材质: 尼龙 UL94 V-0/2

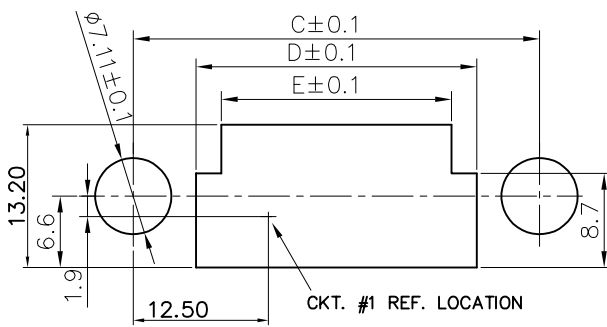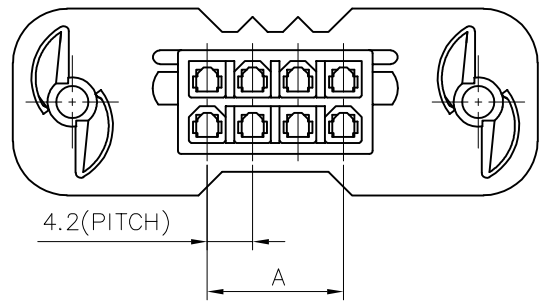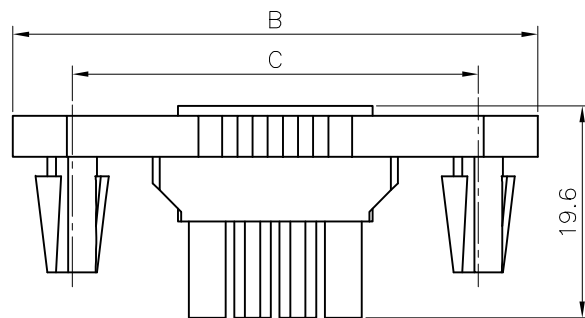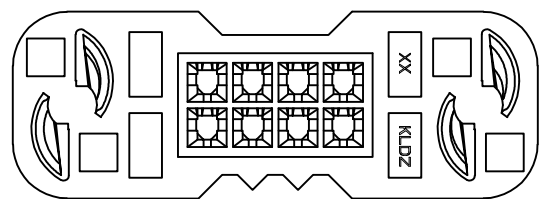

RECOMMENDED PANEL CUT-OUT  
 FOR 1.27mm THICK PANEL

PIN数	DIM				
	A	B	C	D	E
2X1	/	36.0	25.0	13.4	8.7
2X2	4.2	40.2	29.2	17.6	12.9
2X3	8.4	44.4	33.4	21.8	17.1
2X4	12.6	48.6	37.6	26.0	21.3
2X5	16.8	52.8	41.8	30.2	25.5
2X6	21.0	57.0	46.0	34.4	29.7
2X7	25.2	61.2	50.2	38.6	33.9
2X8	29.4	65.4	54.4	42.8	38.1
2X9	33.6	69.6	58.6	47.0	42.3
2X10	37.8	73.8	62.8	51.2	46.5
2X11	42.0	78.0	67.0	55.4	50.7
2X12	46.2	82.2	71.2	59.6	54.9

浙江快利电子有限公司  
 Zhejiang Kuaili Electronic Co., Ltd

GENERAL TOLERANCE	
X. °±3°	.XXX ±0.10
.X°±2°	.XX ±0.25
.XX°±1°	.X ±0.35
.XXX°±0.5°	X. ±0.50

DESIGN:	张国旭	DATE:	2023. 11. 04
CHECKED:	王鑫	DATE:	2023. 11. 04
AUDITED:	朱继衡	DATE:	2023. 11. 04
APPROVED:	王子林	DATE:	2023. 11. 04


DWG. NO.	PART NO. KL-C4201G-2xNY-09-W
TITLE.	

TITLE.  
 C4201G-2xNY

REV.	A	UNIT.	MM	SCALE.	1:1	
------	---	-------	----	--------	-----	--

RoHS

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	张国旭	2023. 11. 04

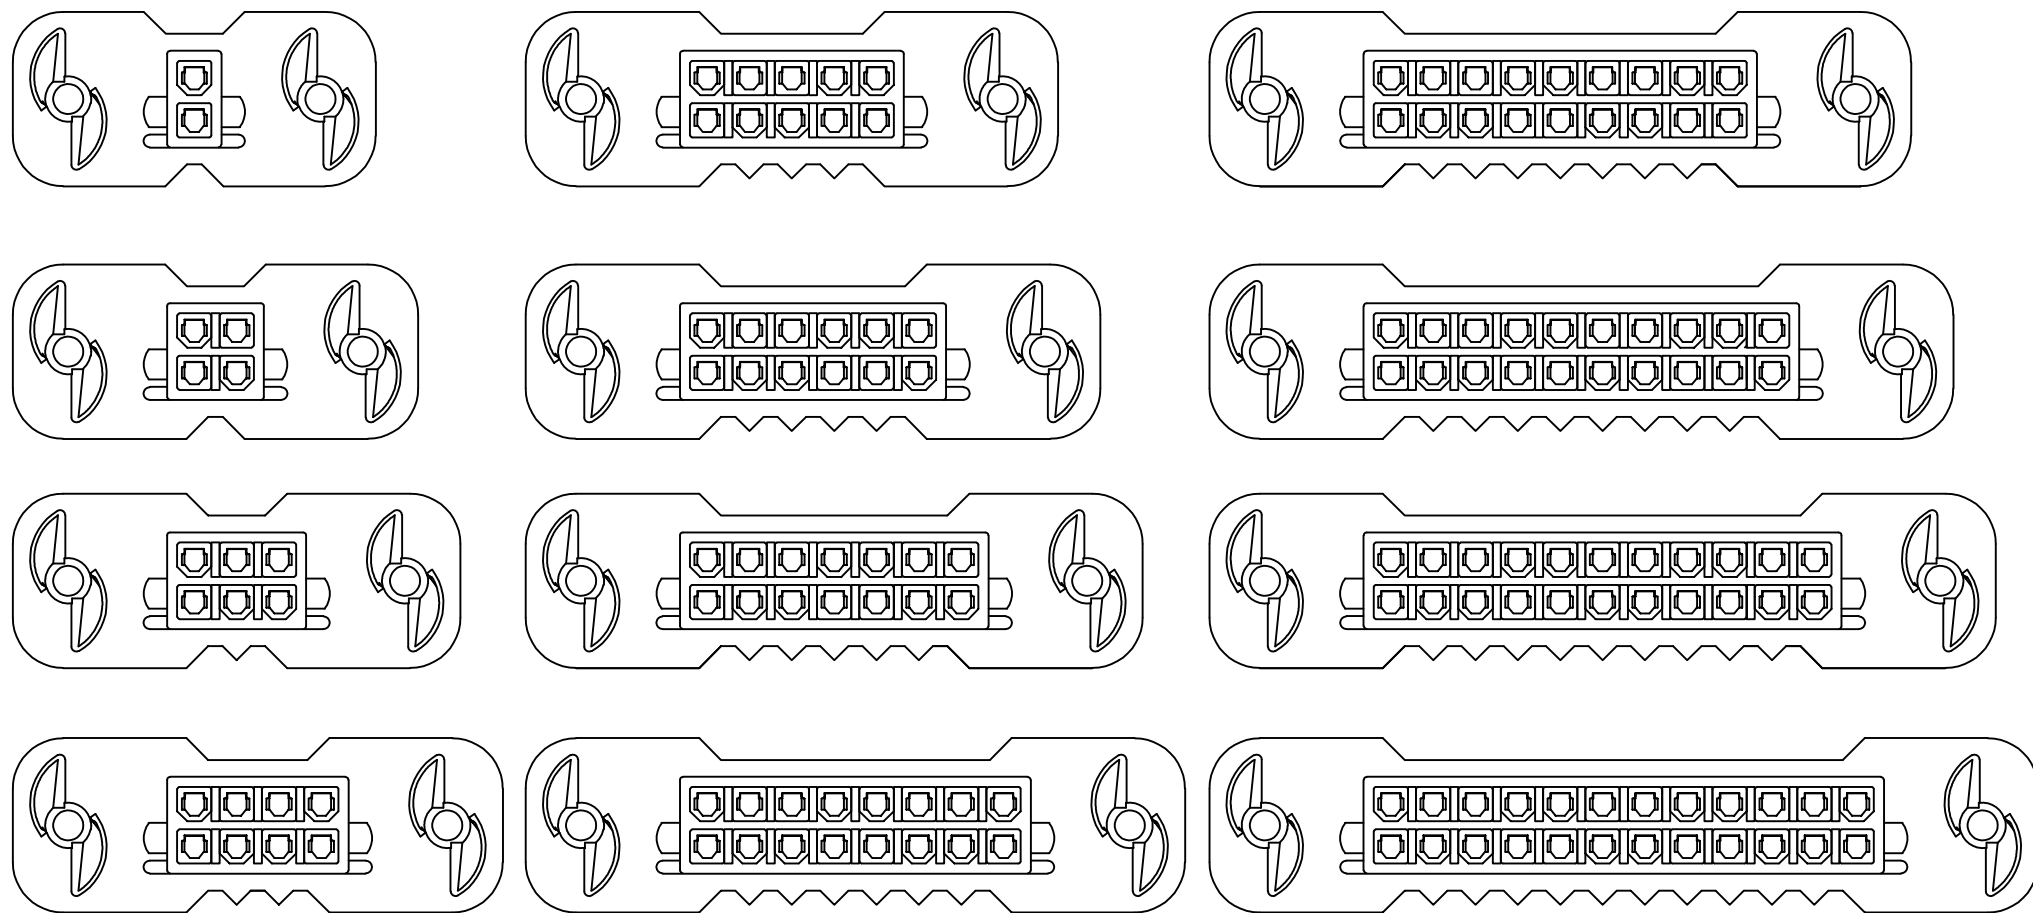

 浙江快利电子有限公司  
Zhejiang Kuaili Electronic Co., Ltd

GENERAL TOLERANCE	
X. °±3°	.XXX ±0.10
.X°±2°	.XX ±0.25
.XX°±1°	.X ±0.35
.XXX°±0.5°	X. ±0.50

DESIGN:	张国旭	DATE:	2023. 11. 04
CHECKED:	王鑫	DATE:	2023. 11. 04
AUDITED:	朱继衡	DATE:	2023. 11. 04
APPROVED:	王子林	DATE:	2023. 11. 04

DWG. NO.	TITLE.
PART NO.	
KL-C4201G-2xNY-09-W	

TITLE.  
C4201G-2xNY

REV.	A	UNIT.	MM	SCALE.	1:1	
------	---	-------	----	--------	-----	---

F

E

D

C

B

A

1 2 3 4 5 6 7 8 9